

Project	Quantity	Item #
Model Specified:		CSI Section 11400

Air Curtain Refrigerator Models/ Self-Contained



Full Height Door
Hinged Right Model



Full Height Door Hinged Left
Full Height Door Hinged Right
Full Height Door With Lock Hinged Left
Full Height Door With Lock Hinged Right


RAC37-1
RAC37-2
RAC37-9
RAC37-8

The Reach-In Air-Curtain model was designed for institutional use, allowing the door to be kept open during tray make-up. The unit will maintain an interior temperature of 45° or less for up to 45 to 90-minutes while the door is open. In addition, it was specifically designed to be mobile. To facilitate this, casters are supplied standard, as are stainless steel side hand grips and a tubular rear mounted handle. The refrigeration system is located at the bottom in order to provide greater stability during movement. This model now includes a standard "2-Stage" thermostat which allows products such as milk and juices to be pre-chilled for prolonged tray delivery times.

Standard Features

- Stainless Steel Exterior & Interior
- Ten Pairs Of Tray Slides For 18" x 26" Pans
- Multi-Fan 3-D Air Screen System
- Electronic Control With Two Operating Modes:
 - 1- Refrigerator (32°F to 40°F, Preset at 36°F)
 - 2- Refrigerator Lo-Temp (25°F to 35°F, Preset at 34°F)
- Smart Defrost™
- Automatic Defrost With Manual Override Feature
- Digital Thermometer Display
- Full Perimeter Bumper
- Full Length Stainless Steel Door
- Vertical Door Handle & Flush Hand Grips
- Rear Mounted Tubular Handle
- Set of Four (4) 6" High Heavy Duty Casters With Stress Pads
- 8' Cord & Plug Attached
- One Piece Louver Assembly
- Automatic Non-Electric Condensate Evaporator
- Magnetic Door Gaskets
- 1 Year Parts & Labor Warranty
- 5 Year Compressor Warranty

Easy To Use Control Features

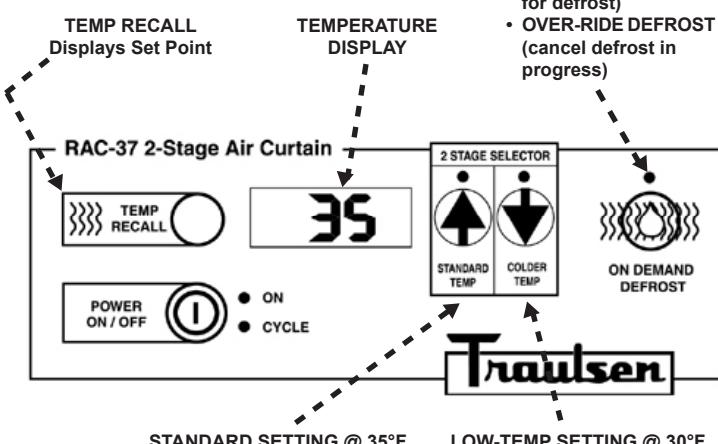

Listed by Underwriters Laboratories Inc.,
to U.S. and Canadian safety standards and
Listed by NSF International in accordance
with ANSI/NSF 7.

Approval: _____



TRAULSEN
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
Website: www.traulsen.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

Project	Quantity	Item #
Model Specified:		CSI Section 11400

Specifications

Construction, Hardware and Insulation

Cabinet exterior, including front, one piece sides, louver assembly and door(s) are constructed of heavy gauge stainless steel. Cabinet interior and door liners are constructed of stainless steel with #3 and 2-B finish. Exterior cabinet top, back and bottom are constructed of 18 & 20 gauge stainless steel with #3 finish. A set of four (4) 6" high heavy duty poly casters with stress pads are included, two fixed and two swivel with brake.

Doors are equipped with 12 gauge stainless steel .320 diameter pin hinges. Door opens to 270 degrees and is provided with a "door hold open" latch to allow for easy loading and unloading of product. A full length vertical door handle is included for ease of use.

Vinyl magnetic door gasket assures tight door seal. Door contains high density, non-CFC, polyurethane insulation.


DIMENSIONAL DATA	RAC37
Width - Overall in. (including bumper)	32 $\frac{1}{4}$ (81.9 cm)
Depth - Overall in. (including bumper)	39 (99.1 cm)
Height - Overall on 6" Casters in.	79 $\frac{1}{4}$ (201.3 cm)
Depth - Cabinet only in.	32 $\frac{5}{8}$ (82.9 cm)
Depth - Cabinet only including door in.	36 $\frac{1}{4}$ (92.1 cm)
Width - Cabinet only in.	28 $\frac{1}{8}$ (72.7 cm)
Clear full door height in.	43 $\frac{3}{4}$ (111.1 cm)
Clear door width in.	18 $\frac{1}{8}$ (46.7 cm)
Net Weight - uncrated lbs.	410 (190 kg)
ELECTRICAL DATA	
Voltage	120/60/1
Feed Wires (8' cord & plug with ground)	3
Wattage	1668
Full Load Amperes (running)	14.7
HP	1/2 HP
REFRIGERATION DATA	
Refrigerant	R-404A
Oil Specifications	Polyol Ester Oil
CAPACITY	
Max 10 each of 18" x 26" or 12" x 20" pans at 4 $\frac{1}{2}$ " spacings	

Note: Figures in parentheses reflect metric equivalents.



Equipped With One NEMA 5-20P Plug

Full load amps and plug style may vary depending on electrical options chosen and condensing unit employed.

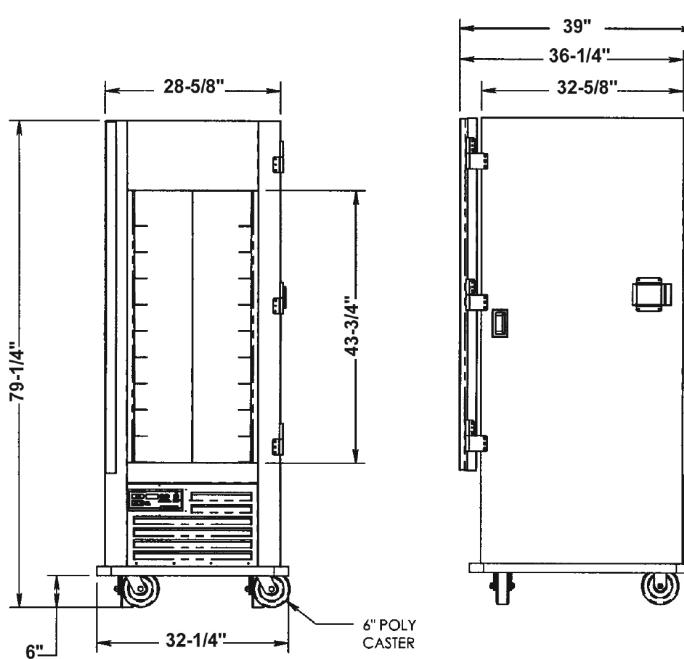

RAC37-FHS Front View

RAC37-FHS Side View

NOTE: When ordering please specify: Voltage, Hinging, Door Size and any Options.
Continued product development may necessitate specification changes without notice.

Part No. TR35803 (REV. 07-21-16)

TRAULSEN
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
E-MAIL: Website: www.traulsen.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

