HOBART

Project_____

AIA #_____ SIS #_____

Item # _____ Quantity _____ C.S.I. Section 114000

ACCESS – CLAS
Semi-Auto Wrapping System

**CLAS semi-automatic system pictured
with W32 wrap station, SP-5 sealer belt,
CLAS-1LR, and Access scale, console and printer**

Reference F40256 for CLAS components and accessories

CLAS SYSTEM DEVICES

❏ **CLAS-1LR** *or* ❏ **CLAS-1RL** –
Includes Compact Label Applier w/sensors, integrated heavy-duty frame and scale/conveyor. Must be directionally ordered right to left, or left to right.

❏ **EPP-3**   Access Prepack Printer

❏ **EPCP-5i**   Linux operating system, HT series functionality

❏ **W32-6**   Wrap station

❏ **SP-5**   Sealer belt conveyor

❏ **RBG-2**   Rotary bin conveyor

STANDARD FEATURES

+ Simple, reliable operation

+ Access/CLAS system averages 14 packages per minute

+ Conveyor scale, weighs up to 30 lb. x .01 increments

+ Left to right or right to left configurations

+ 4-position swivel wand lets you rotate labels in all four directions

+ Rugged stainless steel construction

+ Easy to clean sanitary design

SPECIFIER STATEMENT

The Hobart CLAS semi-automatic wrapping system weighs your product and provides label application after a package has been hand wrapped. Hobart offers a variety of accessories to go with the CLAS to customize the best solution for your meat room. Left to Right or Right to Left orientation must be determined for purchase.

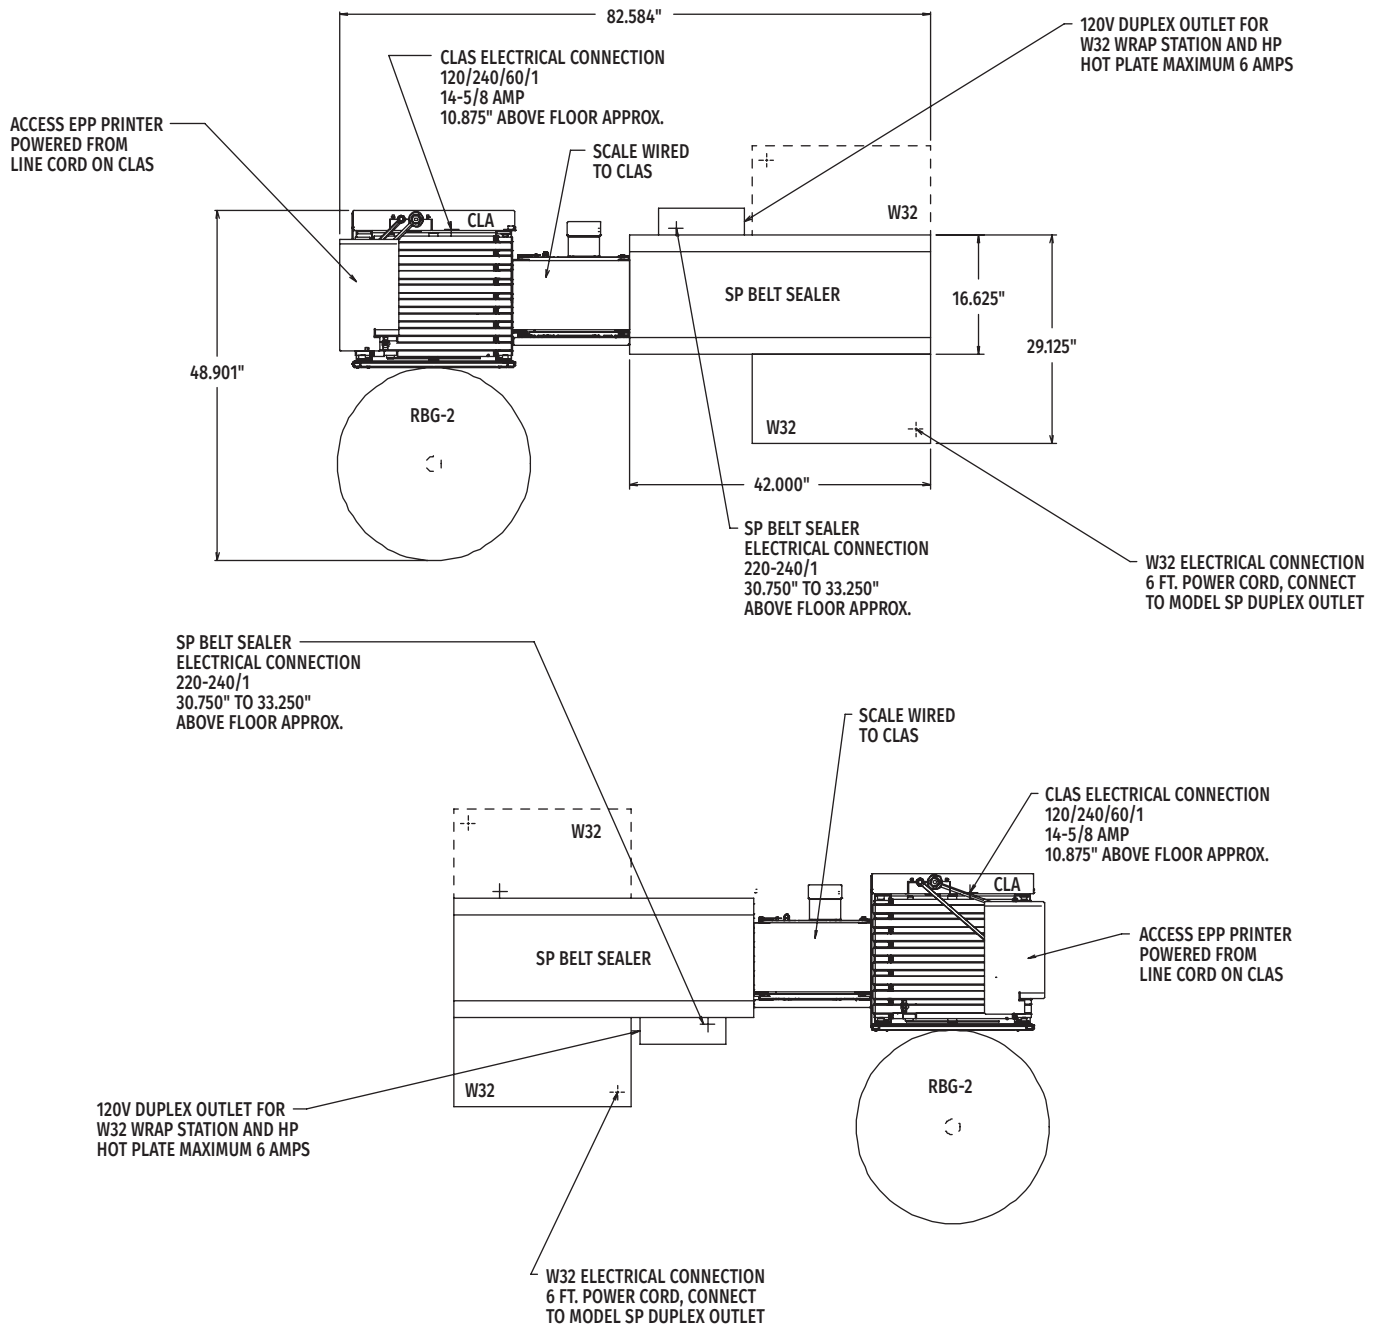Approved by_____ Date_____ Approved by_____ Date_____

HOBART

SPECIFICATIONS

Construction: Heavy gauge stainless steel frame, legs and panels

Dimensions: *System* – 8'11" x 2'6"; *CLAS-1* – 22" long x 24⅜" wide x 65¼" high

Electrical: 120/240 (3 wire)/60/1 14.5/8.0 amps

Shipping Weight: CLAS-1 – 264 lbs.

DETAILS AND DIMENSIONS

82.584"

120V DUPLEX OUTLET FOR W32 WRAP STATION AND HP HOT PLATE MAXIMUM 6 AMPS

CLAS ELECTRICAL CONNECTION 120/240/60/1 14-5/8 AMP 10.875" ABOVE FLOOR APPROX.

ACCESS EPP PRINTER POWERED FROM LINE CORD ON CLAS

SCALE WIRED TO CLAS

CLA

W32

SP BELT SEALER

16.625"

29.125"

48.901"

RBG-2

W32

42.000"

SP BELT SEALER ELECTRICAL CONNECTION 220-240/1 30.750" TO 33.250" ABOVE FLOOR APPROX.

W32 ELECTRICAL CONNECTION 6 FT. POWER CORD, CONNECT TO MODEL SP DUPLEX OUTLET

SP BELT SEALER ELECTRICAL CONNECTION 220-240/1 30.750" TO 33.250" ABOVE FLOOR APPROX.

SCALE WIRED TO CLAS

CLAS ELECTRICAL CONNECTION 120/240/60/1 14-5/8 AMP 10.875" ABOVE FLOOR APPROX.

W32

SP BELT SEALER

CLA

ACCESS EPP PRINTER POWERED FROM LINE CORD ON CLAS

RBG-2

120V DUPLEX OUTLET FOR W32 WRAP STATION AND HP HOT PLATE MAXIMUM 6 AMPS

W32

W32 ELECTRICAL CONNECTION 6 FT. POWER CORD, CONNECT TO MODEL SP DUPLEX OUTLET

Access - CLAS System

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.

HOBART • 701 S Ridge Avenue, Troy, OH 45374 • 1-888-4HOBART • www.hobartcorp.com   Printed in U.S.A.